

記号	年月日	備考
①	2025. 1. 14	寸法表訂正
②		
③		

呼び径		板厚	L	L1	L2	L3
D1、D2	D3	t				
100	100	0.6	260	80.0	180.0	170
125	100	0.6	260	67.5	192.5	190
	125	0.6	300	87.5	212.5	205
150	100	0.6	260	55.0	205.0	210
	125	0.6	300	75.0	225.0	220
	150	0.6	340	95.0	245.0	235
175	100	0.6	260	42.5	217.5	225
	125	0.6	300	62.5	237.5	240
	150	0.6	340	82.5	257.5	250
200	175	0.6	380	102.5	277.5	265
	100	0.6	260	30.0	230.0	245
	125	0.6	300	50.0	250.0	255
	150	0.6	340	70.0	270.0	270
	175	0.6	380	90.0	290.0	280
225	200	0.6	420	110.0	310.0	295
	100	0.6	260	17.5	242.5	260
	125	0.6	300	37.5	262.5	275
	150	0.6	340	57.5	282.5	285
	175	0.6	380	77.5	302.5	300
	200	0.6	420	97.5	322.5	310
	225	0.6	460	117.5	342.5	325
250	100	0.6	260	5.0	255.0	280
	125	0.6	300	25.0	275.0	290
	150	0.6	340	45.0	295.0	305
	175	0.6	380	65.0	315.0	312
	200	0.6	420	85.0	335.0	330
	225	0.6	460	105.0	355.0	340
	250	0.6	500	125.0	375.0	355

$$L = 1.6 \times D3 + 100$$


$$L1 = 0.8 \times D3 + 50 - 0.5 \times D1$$

$$L2 = 0.8 \times D3 + 50 + 0.5 \times D1$$

$$L3 = 0.5 \times D3 + 50 + 0.71 \times D1$$

単位：mm

呼び径		板厚	L	L1	L2	L3	
D1、D2	D3	t					
275	100	0.6	260	-7.5	267.5	295	
	125	0.6	300	12.5	287.5	310	
	150	0.6	340	32.5	307.5	320	
	175	0.6	380	52.5	327.5	335	
	200	0.6	420	72.5	347.5	345	
	225	0.6	460	92.5	367.5	360	
	250	0.6	500	112.5	387.5	370	
	275	0.6	540	132.5	407.5	385	
	300	100	0.6	260	-20.0	280.0	315
		125	0.6	300	0	300.0	325
150		0.6	340	20.0	320.0	340	
175		0.6	380	40.0	340.0	350	
200		0.6	420	60.0	360.0	365	
225		0.6	460	80.0	380.0	375	
250		0.6	500	100.0	400.0	390	
275		0.6	540	120.0	420.0	400	
300	0.6	580	140.0	440.0	415		

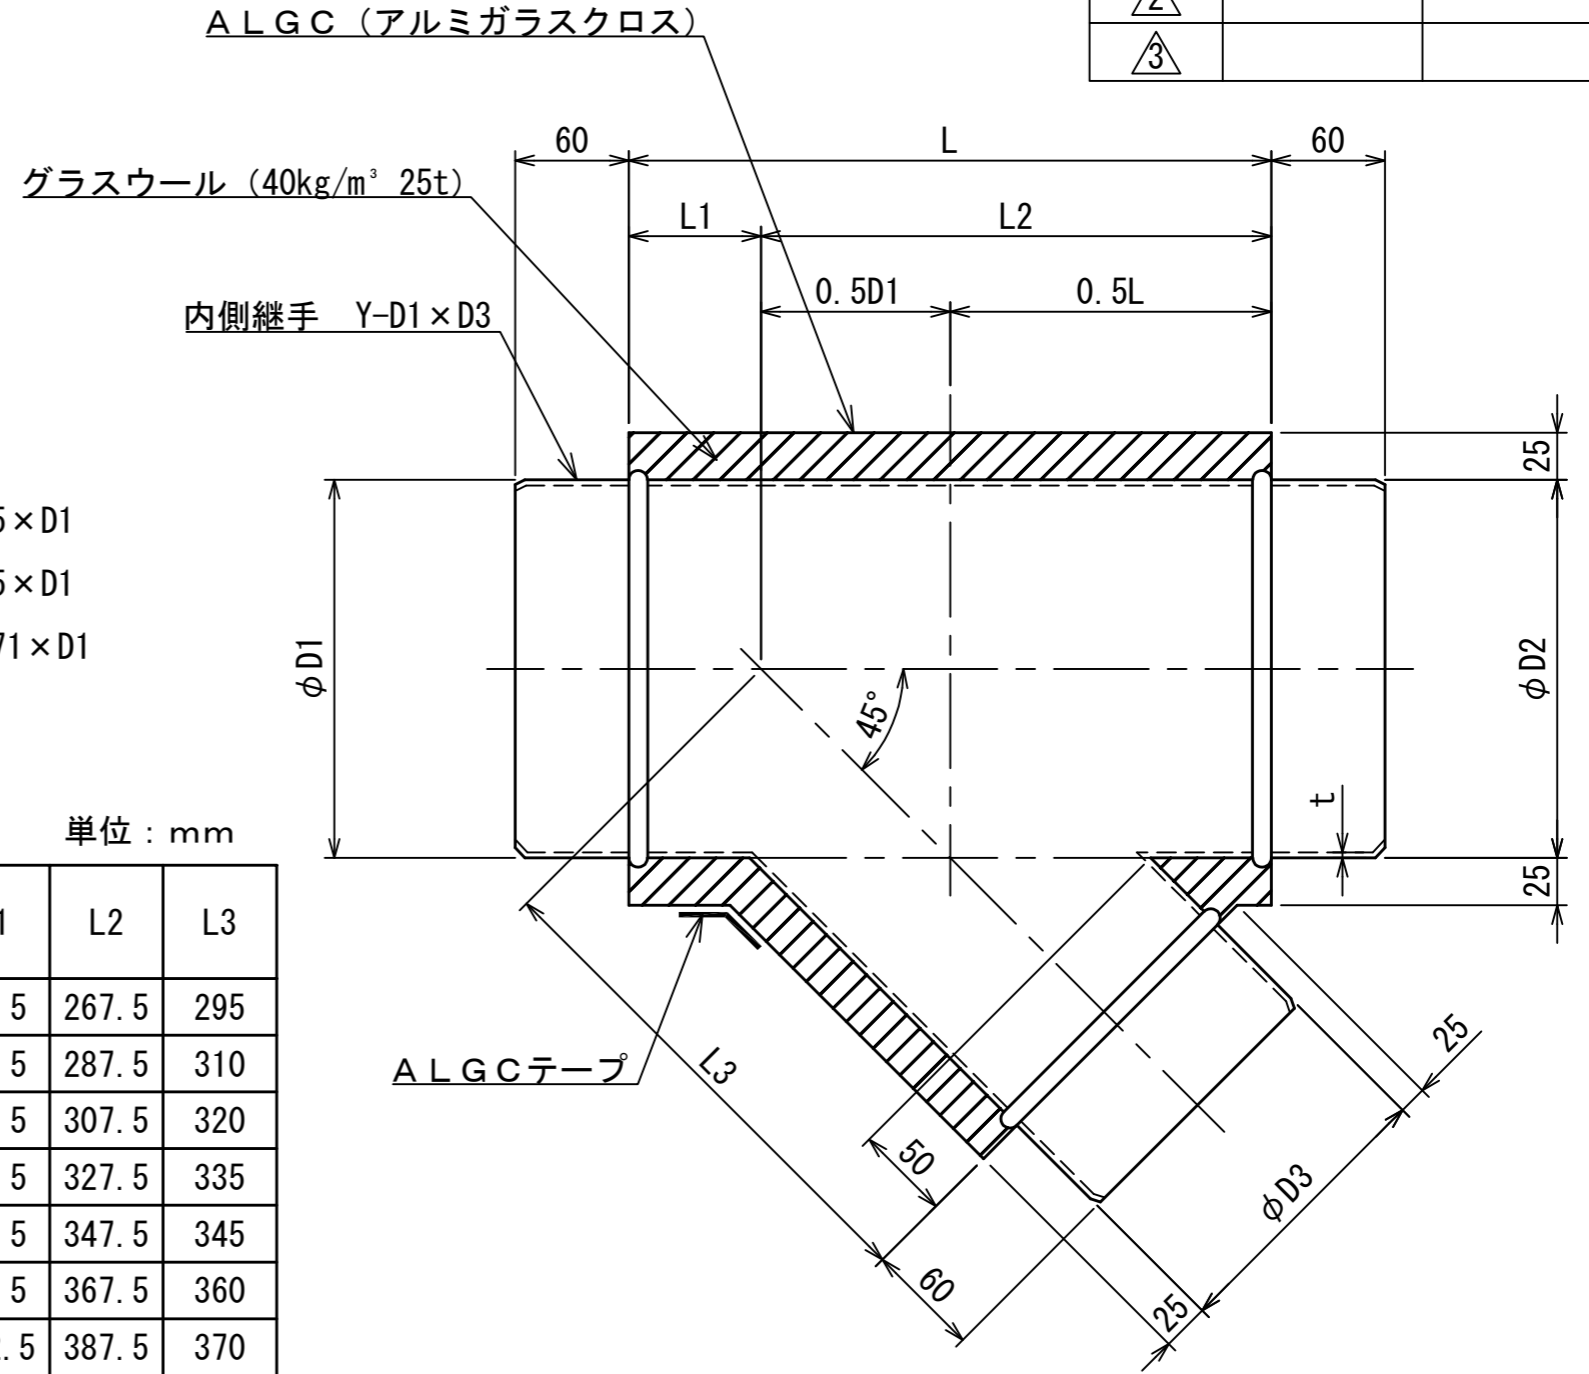

品名	ガラスウール付保温Y管			
型式	GWY_FK_AEN_φ100~φ300			
材質	-			
承認	検図	製図	尺度	FREE
奥山	波	武田	作成日附	2024. 12. 27
			更新日附	2025. 1. 14

株式会社フカガワ